


HF Broadband Multi-wire Dipole Antenna BBA-500, BBA-500/E, BBA1000, BBA1000/E

HF Broadband Multi-wire Dipole Antenna BBA-500, BBA-500/E, BBA1000, BBA1000/E

HF Broadband Multi-wire Dipole Antenna BBA-500

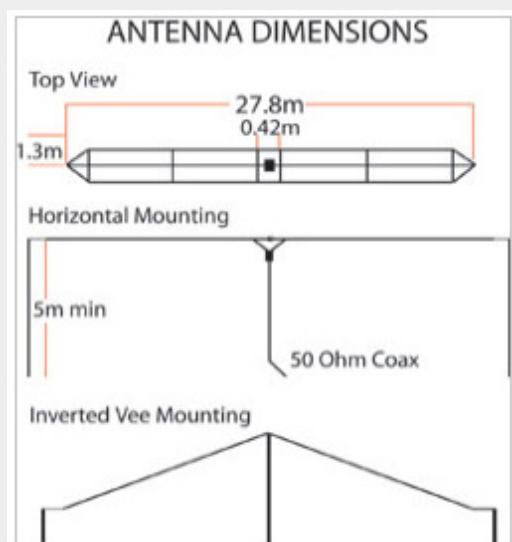

BBA-500 HF Broadband multi wire base antenna. 500 Watts PEP. Sturdy Stainless steel and fibreglass construction, can be mounted horizontally or as inverted V. Supplied with 30m of coaxial cable and instructions.

No antenna tuner required!

Technical specifications

Frequency Range	2-30MHz
Impedance	50 Ohms
Power Rating	


	750 Watts PEP
VSWR	Better than 2:1 cross band
Connector	UHF
Overall Length	28m
Mounting Height	10m minimum
Wind Rating	*210 Kilometres per hour
Operating Temp	-30 to 55°C ambient Option -40 +60
Shipping Weight	10Kg
Shipping Size	135 x 32 x 24 cm

AT Communication ©

Options

- ☒ Coax cable: 30m RG213 coax cable
- ☒ RF Connector: N or other type

HF Broadband Multi-wire Base Dipole Antenna BBA-500E

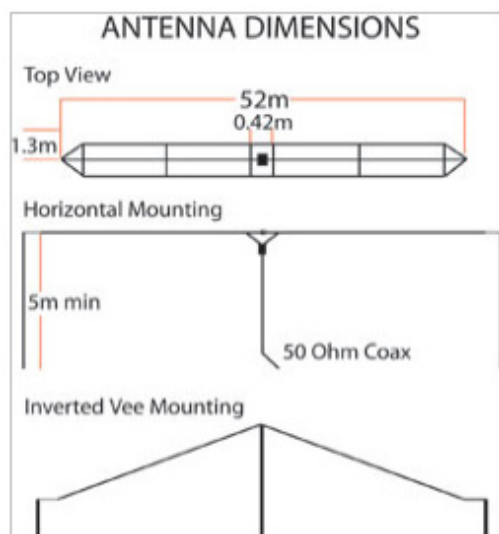

BBA-500E Extended Length version of BBA 500 for increased performance at 2-3MHz.

No antenna tuner required!

Technical specifications


Frequency Range	2-30MHz
Impedance	50 Ohms
Power Rating	750 Watts PEP
VSWR	Better than 2:1 cross band
Connector	UHF
Overall Length	52 m
Mounting Height	10m minimum
Wind Rating	*210 Kilometres per hour
Operating Temp	-30 to 55°C ambient Option -40 +60
Shipping Weight	12Kg

Shipping Size	135 x 32 x 24cm
---------------	-----------------

Options

- ✓ Coax cable: 30m RG213 coax cable
- ✓ RF Connector: N or other type

HF Broadband Multi-wire Dipole Antenna BPA-1000

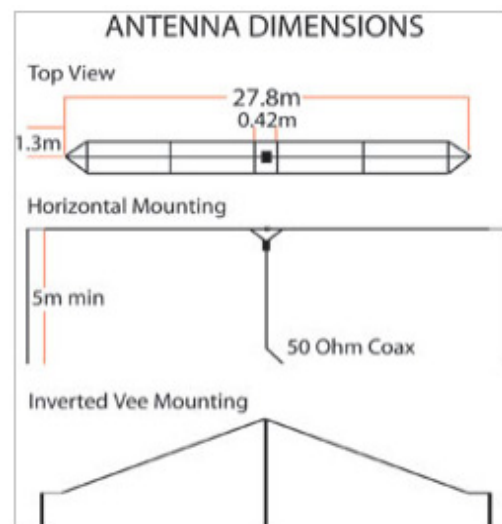

BBA-1000 Broadband multi wire base antenna for 1 Kilowatt PEP. Sturdy Stainless steel and fibreglass construction, can be mounted horizontally or as inverted V. Supplied with 30m of coaxial cable and instructions.

No antenna tuner required!

Technical specifications


Frequency Range	2-22MHz
Impedance	50 Ohms
Power Rating	1500 Watts PEP
VSWR	Better than 2:1 cross band

Connector	N Type
Overall Length	28m
Mounting Height	5m minimum
Wind Rating	*210 Kilometres per hour
Operating Temp	-30 to 55°C ambient Option -40 + 60
Shipping Weight	20Kg
Shipping Size	135 x 32 x 30 cm

Options

✓ Coax cable: 30m RG213 coax cable

HF Broadband Multi-wire Dipole Antenna BBA-1000E

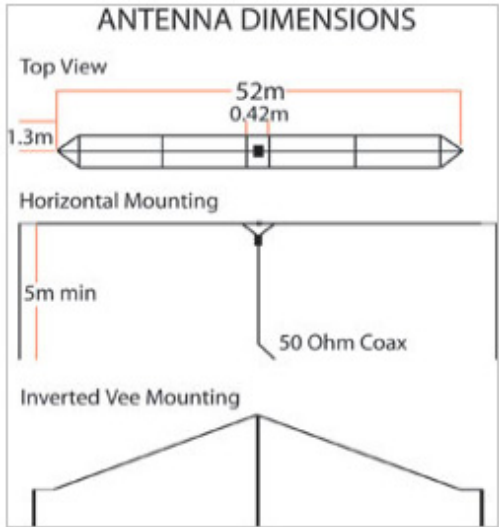

BBA-1000E Extended Length version of BBA 1000 for increased performance at 2-3MHz.

No antenna tuner required!

Technical specifications

Frequency Range	2-22MHz
-----------------	---------

Impedance	50 Ohms
Power Rating	1500 Watts PEP
VSWR	Better than 2:1 cross band
Connector	N Type
Overall Length	52 m
Mounting Height	10m minimum
Wind Rating	*210 Kilometres per hour
Operating Temp	-30 to 55°C ambient Option -40 +60
Shipping Weight	23Kg
Shipping Size	135 x 32 x 30 cm

Options

☒ Coax cable: 30m RG213 coax cable

HF Broadband Dipole Antenna